



MODEL

ILC

APPLICATION

- Front panel

FEATURES

- Easy to read
- Negative common pole, positive on request

DESCRIPTION


Mounting position indicator in front of panel with round front plate (position) Ø 33 mm or square front plate (switch) 33x33 mm, coloured black.

According to the voltage present at the terminals of the ILC you can have a red line vertical AND green horizontal


The cut off panel is Ø28 mm.

	TECHNICAL SPECIFICATION	UNIT	VALUE
1.	SUPPLY VOLTAGE	V	24-220 DC
2.	DIELECTRIC RIGIDITY TEST	kV	1,5 CA(50 Hz) 1min
3.	PROTECTION DEGREE		IP20
4.	MOUNTING		Front panel
5.	WEIGHT	kg	See table
6.	MARKING		CE

ELECTRICAL CIRCUIT

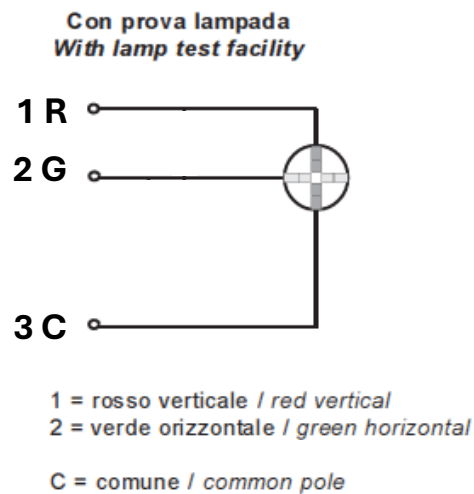

DIMENSION

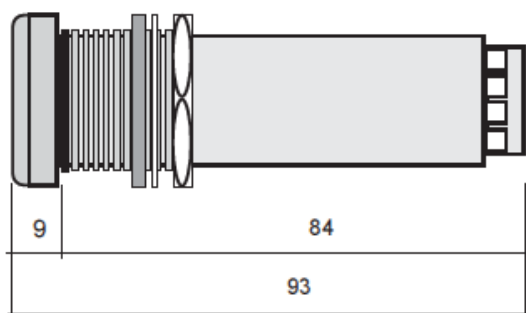

CODE	DESCRIPTION	VOLTAGE [V]	DIAM L/A/S [mm]	WEIGHT [Kg]
I1ILC33024Q	LED POSITION INDICATOR ILC SQUARE	24 CC	33/33/93	0,100
I1ILC33024T	LED POSITION INDICATOR ILC ROUND	24 CC	Diam 33/93	0,100
I1ILC33110Q	LED POSITION INDICATOR ILC SQUARE	110 CC	33/33/93	0,100
I1ILC33110T	LED POSITION INDICATOR ILC ROUND	110 CC	Diam. 33/93	0,100