

MODEL

HY6 Hygrostat
HY7 Hygro-Thermostat

APPLICATIONS

- Cabinets for electrical distribution
- Cabinets for industrial automation


FEATURES

- Mounting on DIN 35mm or panel
- Bi-metal thermostat
- Synthetic fiber sensors
- Connection through inner screw terminal


	TECHNICAL SPECIFICATIONS	VALUES
1.	SETTING RANGE	35 > 100% RH
2.	SENSOR	Synthetic fiber
3.	VOLTAGE SUPPLY	V 24-230 AC
4.	CONTACT	1 NC – 1 NO
5.	BREAKING CAPACITY	10A (250 VAC)
6.	CONNECTION	Through inner screw terminal
7.	MOUNTING	Panel / DIN Rail

ELETTICAL CONNECTIONS

HY6001

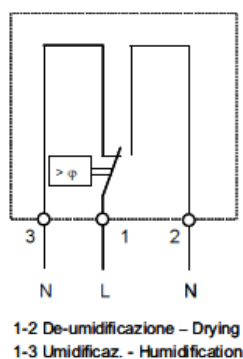

HY7001

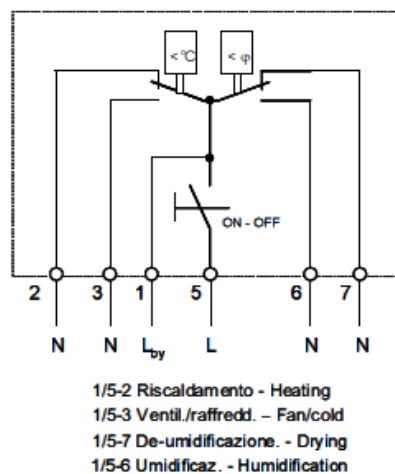

CODE	DESCRIPTION	TEMP. SCALE [°C]	REGULATION UR. %	DIM L / A / S [mm]	WEIGHT [Kg]
HY6001	HYGROSTAT DIN RAIL	+5/+60	35-100	75/75/25	0,080
HY7001	HYGROTHERMOSTAT DIN RAIL	+5/+60	35-100	127,5/75/28,5	0,160